#Jenny

Finally I get this ebook, thanks for all these I can get now!

#Rio

Cool! I'am really happy

#Markus Jensen

I did not think that this would work, my best friend showed me this website, and it does! I get my most wanted eBook

#Hun Tsu

wtf this great ebook for free?!

#Che Salsa

My friends are so mad that they do not know how I have all the high quality ebook which they do not!

#Diego Butler

so many fake sites. this is the first one which worked! Many thanks

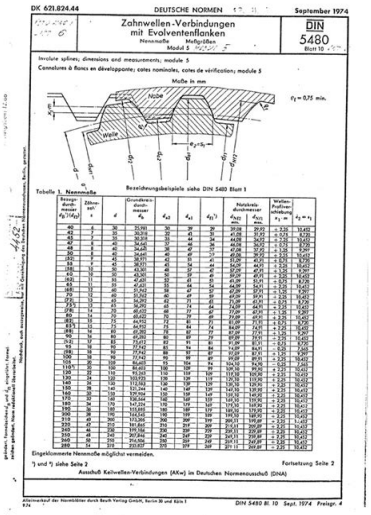

DK 621.824.44 DEUTSCHE NORMEN September 1974

Zahnwellen-Verbindungen mit Evolventenflanken

DIN 5480

Blatt 10

Involute splines; dimensions and measurements; module 5

Cannelures à flancs en développante; cotes nominales, cotes de vérification; module 5

Maße in mm

Nabe

Welle

$e_f = 0{,}75$ min.

Bezeichnungsbeispiele siehe DIN 5480 Blatt 1

Tabelle 1. Nennmaße

Bezugsdurchmesser d_B	Zähnezahl z	d	Grundkreisdurchmesser d_G	d_{G1}	d_{G2}	d_{G3}	Nutzkreisdurchmesser d_{N1}	d_{N2}	Wellen-Profilverschiebung $x_1 = x_2$	$x_2 = x_1$
40	4	36	32,00	32	36	36	39,00	39,00	+ 0,25	10,400
42	4	38	33,50	33	41	38	41,00	37,00	+ 0,25	9,750
45	4	40	36,00	36	44	36	44,00	34,00	+ 0,25	10,400
48	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	9,750
50	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
100	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
105	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
110	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
115	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
120	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
125	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
130	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
135	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
140	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
145	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
150	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
155	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
160	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
165	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
170	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
175	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
180	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
185	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
190	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
195	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
200	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
205	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
210	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
215	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
220	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
225	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
230	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
235	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
240	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
245	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
250	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
255	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
260	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
265	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
270	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
275	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
280	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
285	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
290	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
295	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
300	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
305	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
310	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
315	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
320	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
325	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
330	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
335	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
340	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
345	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
350	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
355	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
360	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
365	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
370	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
375	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
380	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
385	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
390	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
395	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400
400	4	40	36,00	36	48	36	48,00	36,00	+ 0,25	10,400

Eingeklammerte Nennmaße möglichst vermeiden.

*) und *) siehe Seite 2

Fortsetzung Seite 2

Ausschuß Keilwellen-Verbindungen (AKw) im Deutschen Normenausschuß (DNA)

Alleinverkauf der Normblätter durch Beuth Verlag GmbH, Berlin 30 und Köln 1

DIN 5480 Bl. 10 Sept. 1974 Preisgr. 4

Download PDF version of :

Din 5482 Spline Standard Carnoy